


2/14

FIG. 2

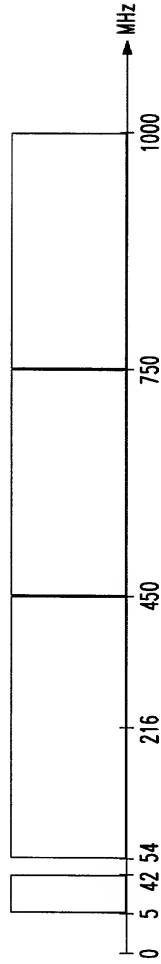

- 54 - 450 MHz : BROADCAST DOWNSTREAM (FROM CABLE HEADEND TO HOME/OFFICE) BY TODAY'S ANALOG BROADCAST CABLE TELEVISION (CATV) WITH 6 MHz PER CHANNEL FOR NTSC VIDEO
- 5 - 42 MHz : UPSTREAM DATA TRANSMISSION (FROM HOME/OFFICE TO CABLE HEADEND) THROUGH SPLITTING CHANNELS (POSSIBLY 1 MHz PER CHANNEL) USING DIGITAL MODULATION SCHEMES
- 450 - 750 MHz : DOWNSTREAM DATA TRANSMISSION (FROM CABLE HEADEND TO HOME/OFFICE) FOR EMERGING SERVICES THROUGH SPLITTING CHANNELS (POSSIBLY 6 MHz PER CHANNEL) USING SWITCHED TRANSMISSIONS WITH DIGITAL MODULATION SCHEMES
- 750 - 1000 MHz : UPSTREAM/DOWNSTREAM DATA TRANSMISSION FOR FUTURE SERVICES

FIG. 3


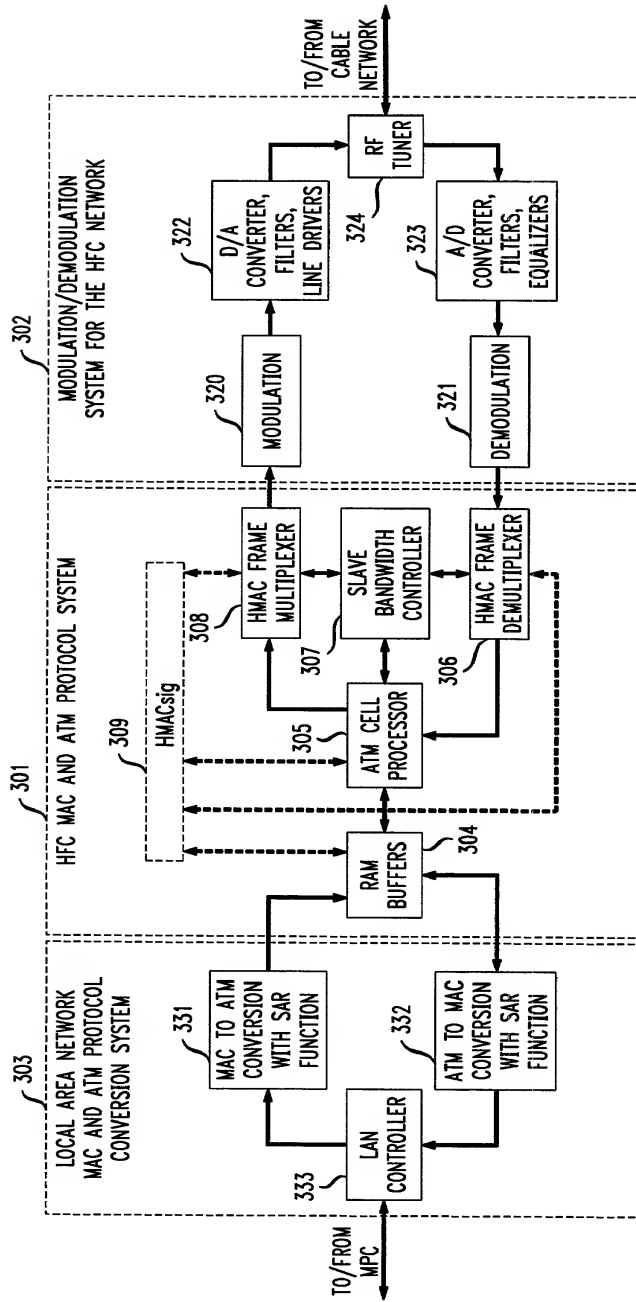


FIG. 4

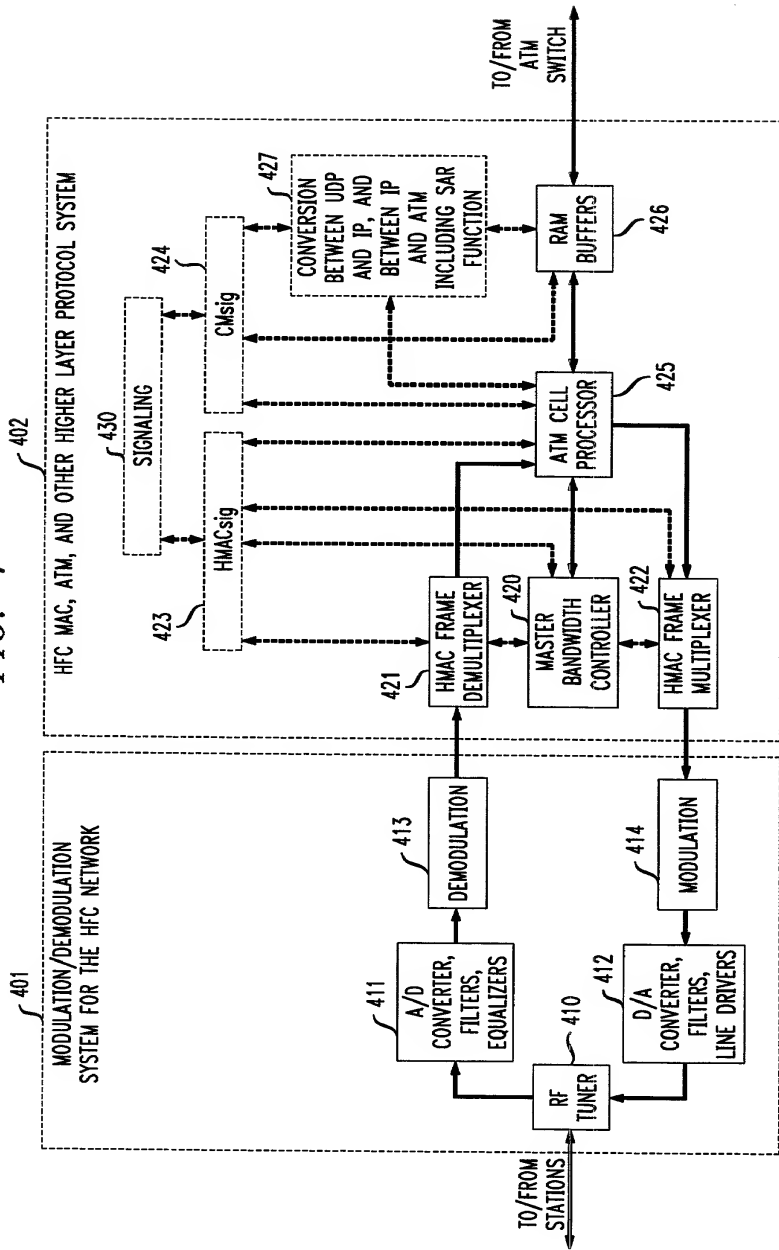

5/14

FIG. 5



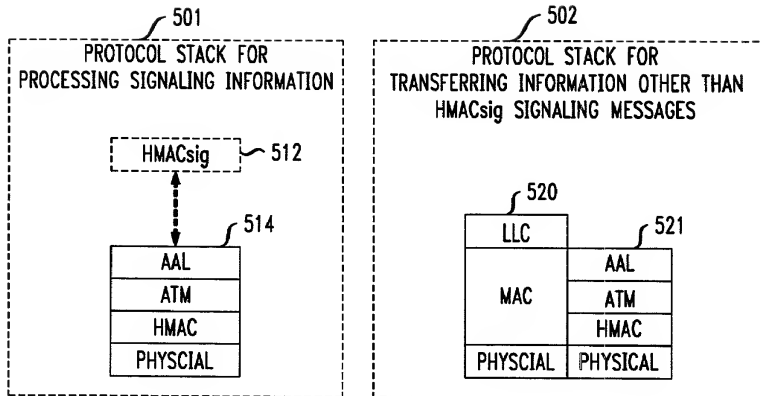


FIG. 6

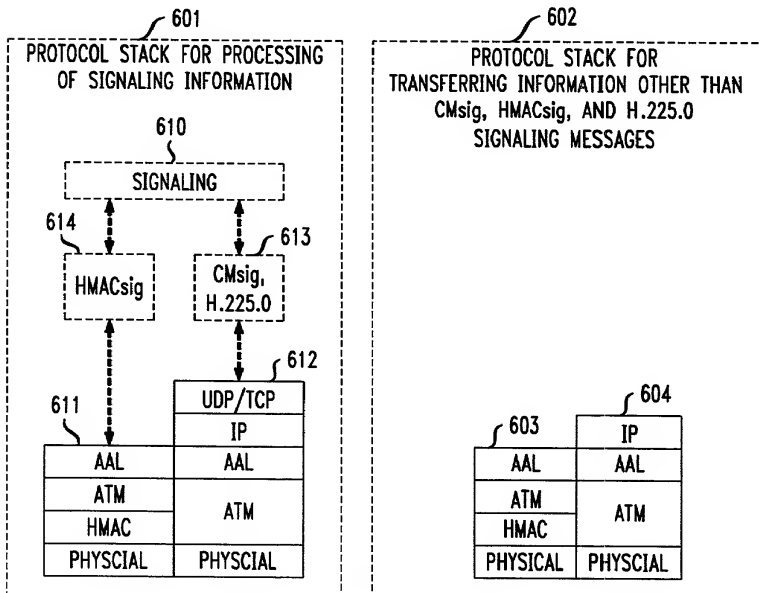


6/14

FIG. 7

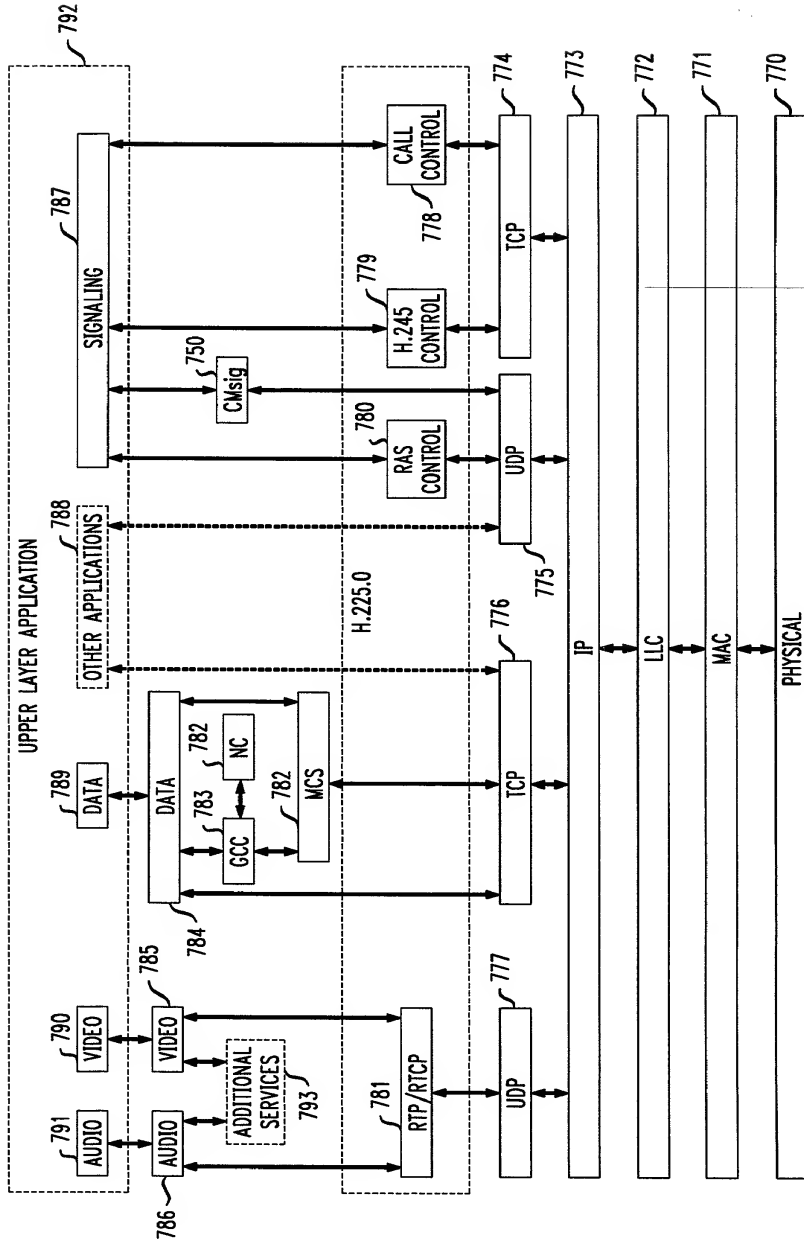


7/14

FIG. 8

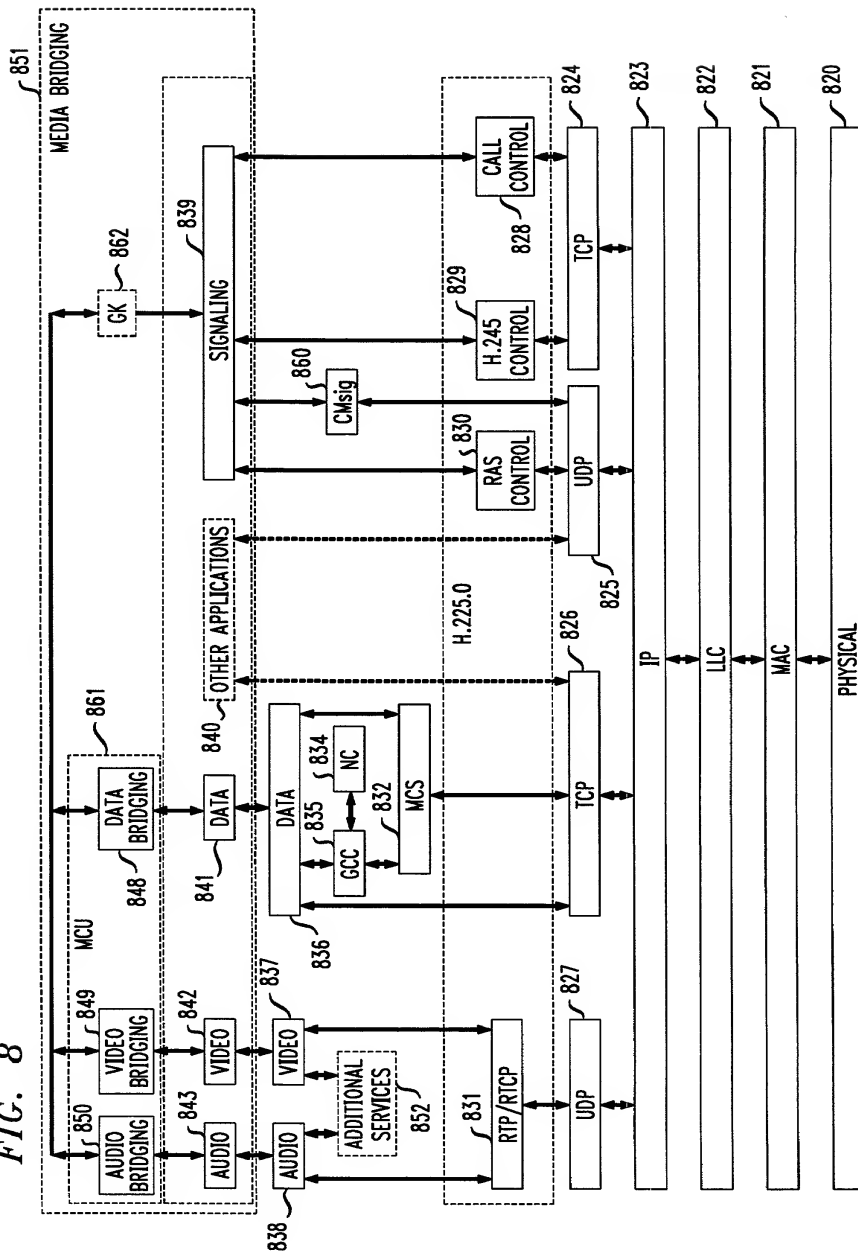

8/14

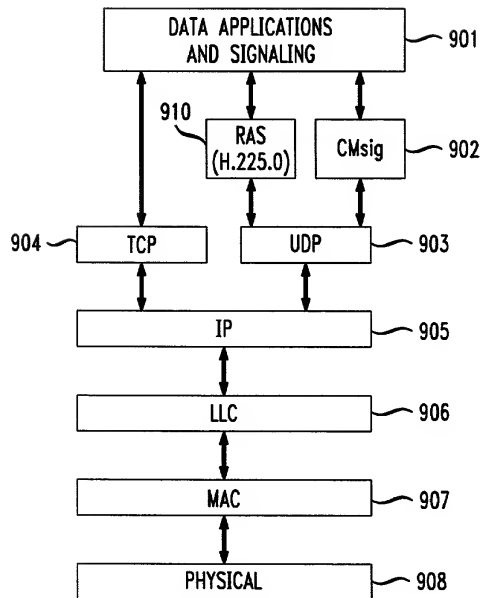FIG. 9

10/14


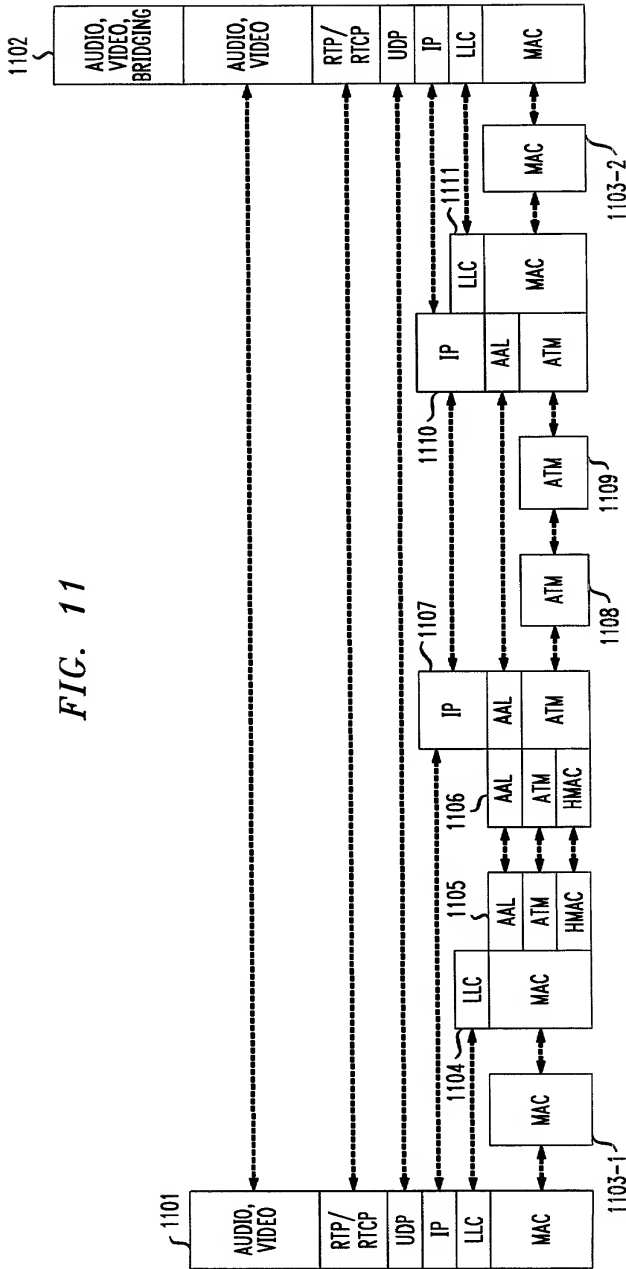



FIG. 11

MULTIMEDIA INFO
MPC
ACCESS MMB SERVER
CENTRAL MMB SERVER

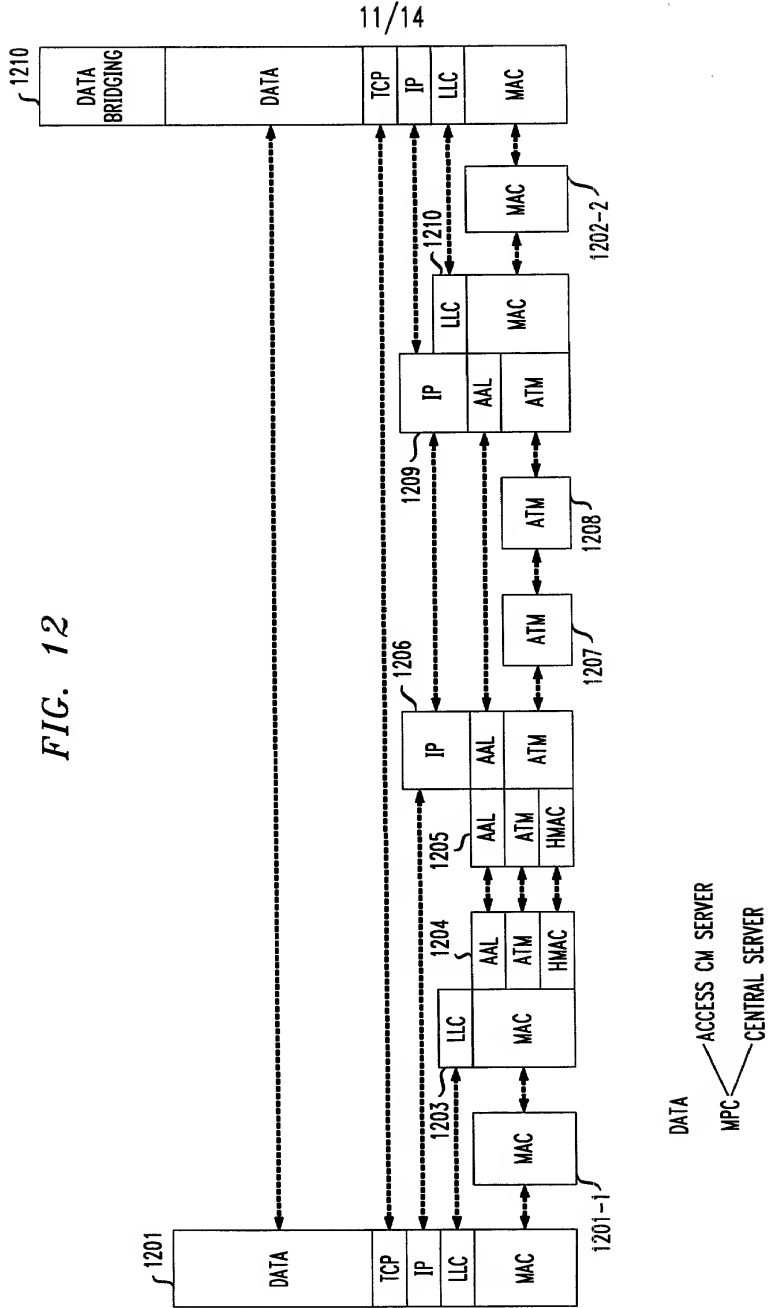


12/14

FIG. 13

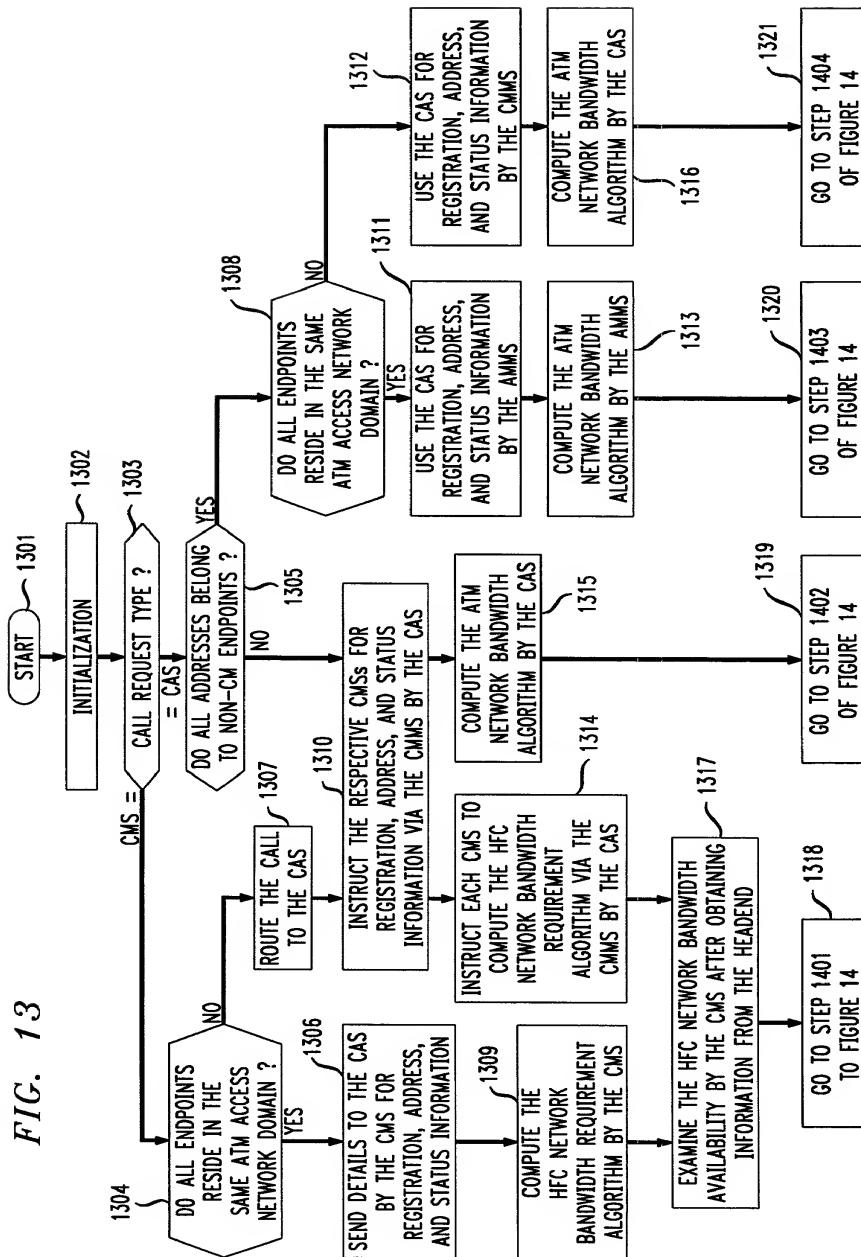

13/14

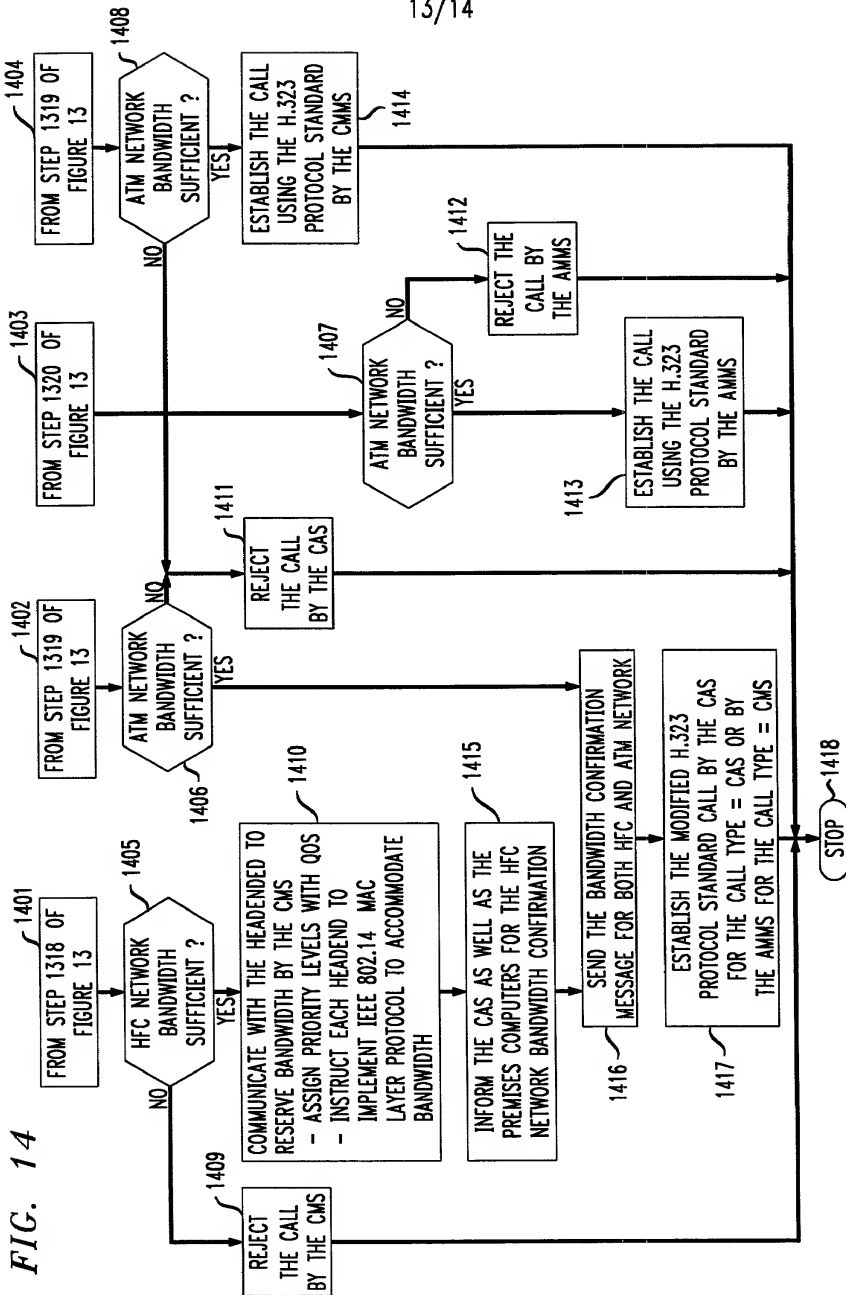

[illegible]